



ACALED10/WW

Calinor LED Polycarbonate Floodlight Warm White 10W Black



Features

Compact and economic polycarbonate LED floodlight suitable for semi commercial applications

Polished faceted reflector and textured glass for optimum performance

Pre-wired with 1 metre of rubber insulated cable for ease of installation (500mm for 10W)

Polycarbonate spike accessory allowing installation into lawn and garden applications


Non-dimmable

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP65
IK Rating	IK08
Class Protection	2
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 20,000
Warranty (Years)	2
CE Mark	Yes
Width (mm)	119
Height (mm)	135
Depth (mm)	50
Accessories	AMFLSA

Technical Information

Wattage	10W
Lumens Delivered	892lm
Lm/W	89lm
Beam Angle	75x90
CRI	Ra 80
CCT	3000K
Input	230V
Hertz	50Hz
Operating Temp	-15°C to 40°C
SDCM	6

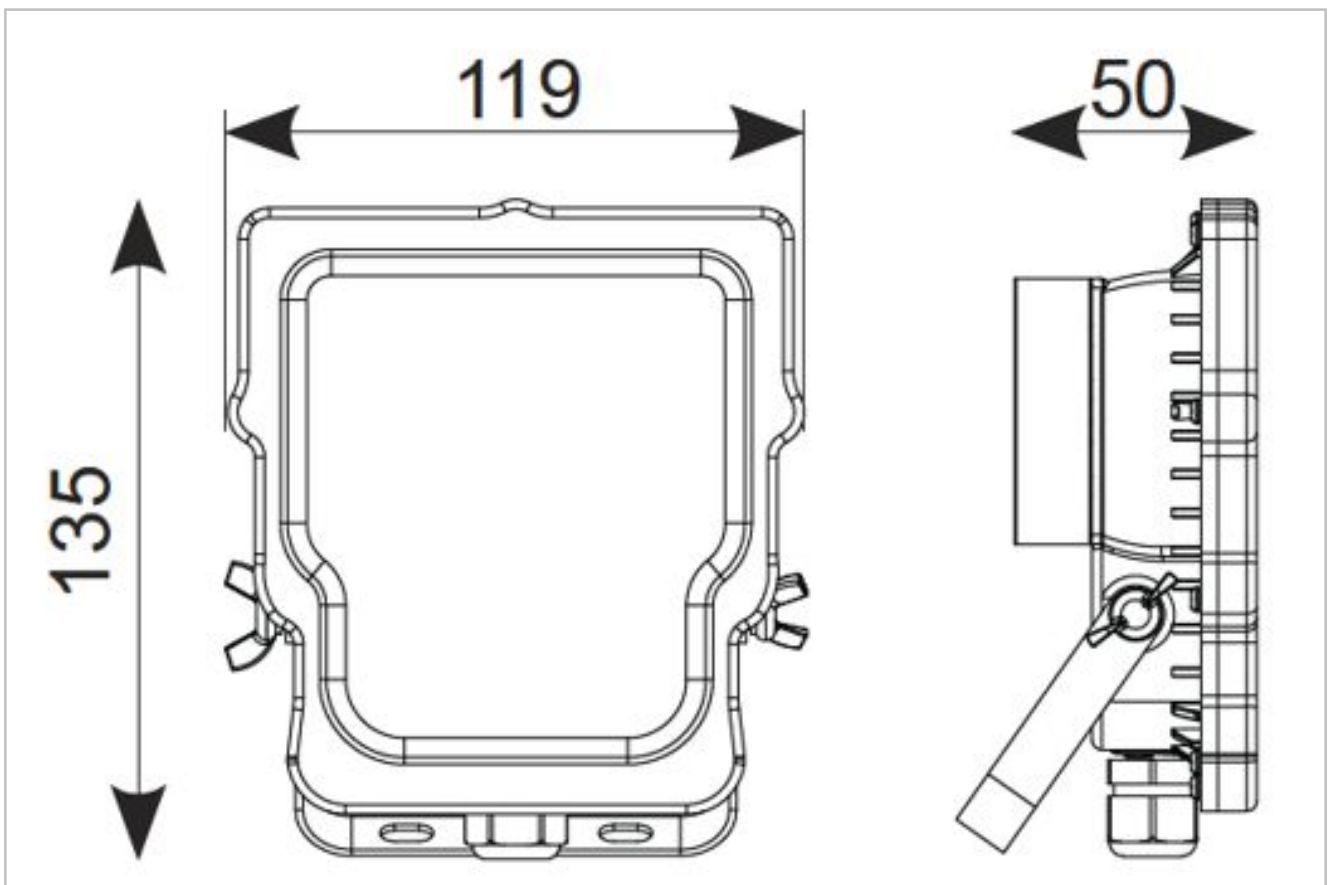

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 8:50:52 AM