



AOLLBLED/2

Opti-Linear Low Bay 2



Features

LED Low Bay suitable for industrial and commercial applications

Ideal for any retro-fit applications replacing any traditional light sources

Fast install/wiring via access hatch on the back of the product with push fit terminals

Instant light output and unlimited switching

Supplied c/w 1.5 metre catenary suspension kit

Mild Steel powder coat construction



1-10V dimmable as standard

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP20
IK Rating	IK08
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Lifetime (Hrs)	L80 B10 54,000h
Warranty (Years)	3
CE Mark	Yes
Length (mm)	1,197 mm
Width (mm)	201 mm
Height (mm)	45 mm

Technical Information

Wattage	156W
Lumens Delivered	20960lm
Lm/W	134lm/W
Beam Angle	50/100
CRI	80
CCT	4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-30°C to 45°C
SDCM	5

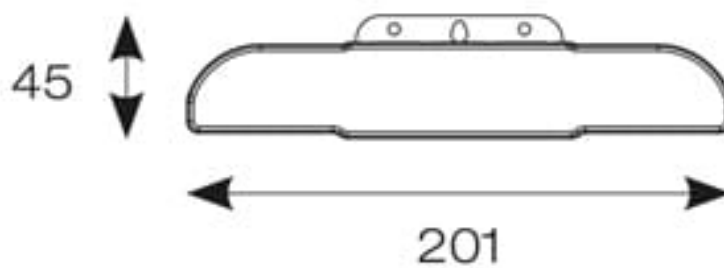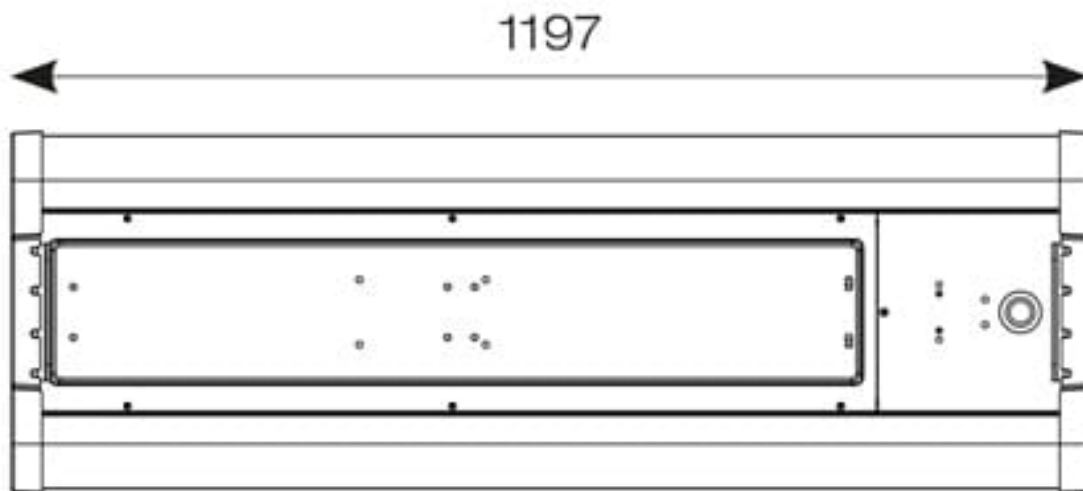

Datasheet generated from <https://onetimepim.com> last updated Monday, July 25, 2022 11:44:32 AM