



AZPELED/2

Z LED Performance UFO High Bay 150W 4000K



Features

Robust LED low/high bay for industrial, commercial and retail applications

Die-cast powder coated construction and heatsink for optimum thermals and performance

Alternative installation options by means of drop rods, jack chain and catenary wire

Additional lens options offer mid (85°) and narrow (55°) beam angles; ideal for racking aisles

Bracket accessories available for ceiling or wall mounting

Pre-wired with 3M of H07RN-F cable for ease and speed of installation

1-10V dimmable as standard



General Information

Lamp Type	LED
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface/Suspended
Lifetime (Hrs)	L80 B10 54,000
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	321
Depth (mm)	172
Accessories	AZPELED/FB1, AZPELED/REF

Technical Information

Wattage	150W
Lumens Delivered	23000lm
Lm/W	150lm
Beam Angle	110
CRI	Ra 80
CCT	4000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-30°C to 45°C
SDCM	4

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 8:56:15 AM

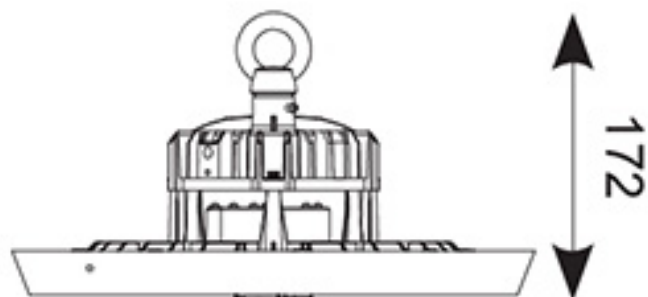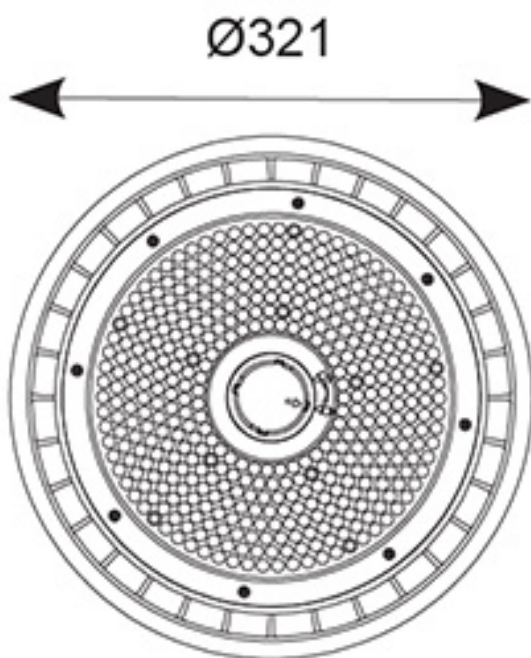

AZPELED/2