


## 72R21SB-W

### Hartland | HARTLAND RANGE | Rocker Switches

#### Item Image




#### Wiring

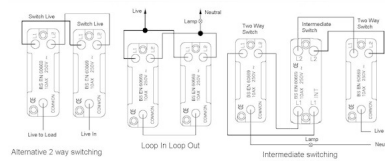

#### Dimensions

**Hamilton®**  
HARTLAND  
R21  
2 Way Rocker

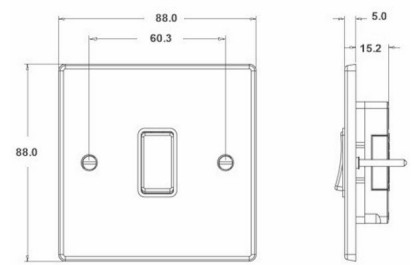

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Primary Range                 | Hartland                                             |
| Insert Type                   | 1 gang 10AX 2 Way Rocker                             |
| Insert Colour                 | Satin Brass/White                                    |
| EAN13 Barcode                 | 5017503223213                                        |
| Commodity Code                | 85363010                                             |
| Luckins TSI                   | 385550631                                            |
| Dimensions(Nominal)           | Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm |
| Weight                        | 104 GR                                               |
| Switched Poles                | Single                                               |
| Current Rating                | 10AX                                                 |
| Voltage                       | 220/250V AC                                          |
| Maximum Load                  | 10 Amp inductive                                     |
| Mains Frequency               | 50Hz                                                 |
| IP Rating                     | IP2XD                                                |
| Contact Gap Minimum           | 3mm                                                  |
| Terminal Capacity 1           | 5x1mm <sup>2</sup>                                   |
| Terminal Capacity 2           | 4x1.5mm <sup>2</sup>                                 |
| Terminal Capacity 3           | 1x2.5mm <sup>2</sup>                                 |
| Terminal Capacity 4           | 1x4mm <sup>2</sup> Multi-strand                      |
| Terminal Capacity 5           | 1x6mm <sup>2</sup>                                   |
| Earth Terminal Capacity 1     | 5x1mm <sup>2</sup>                                   |
| Earth Terminal Capacity 2     | 4x1.5mm <sup>2</sup>                                 |
| Earth Terminal Capacity 3     | 3x2.5mm <sup>2</sup>                                 |
| Earth Terminal Capacity 4     | 1x4mm <sup>2</sup> Multi-strand                      |
| Earth Terminal Capacity 5     | 1x6mm <sup>2</sup>                                   |
| Product Class 1               | Must be earthed                                      |
| Ambient Operating Temperature | -5° to +40°C                                         |
| Recommended Location          | Internal Use Only                                    |
| Maximum Installation Altitude | 2000m                                                |

## 72R21SB-W

### Hartland | HARTLAND RANGE | Rocker Switches

|                                                                                                                                                                                                                                                                                                                                       |                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard/Approval                                                                                                                                                                                                                                                                                                                     | BS EN 60669-1                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| All products listed conform to current British or European standard and the product information is correct at the time of going to press.                                                                                                                                                                                             | All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.         | It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.                                                                                                                                                                                                            | Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. | Correct as at 10 June 2022 01:31 PM<br>E&OE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road,<br>Brislington, Bristol, BS4 5NZ<br>T: +44 (0)1747 860088<br>E: info@hamilton-litestat.com www.hamilton-litestat.com<br>Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB<br>Registered in London No. 941624 VAT Registration No. 222 6607 84 |                                                                                                               |   Listed in      |
| 72R21SB-W - Hartland Satin Brass 1 gang 10AX 2 Way Rocker Satin Brass/White                                                                                                                                                                                                                                                           |                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |