



AIRMLED/POD/3NM/ST



Features

Integral Self-Test emergency pod to convert any new Infinite LED and Endurance LED panel to emergency, instantly.

Simple, quick twist and lock fixing.

Supplied with a pre-wired 1 Metre cable for ease of installation.

Tri-colour LED shows green for healthy running condition, red/flashing for fault conditions and white for emergency operation.

UK Patent No. GB2522285.

European Patent Applied For No. 15165652.7.

Irish Patent No. 2015/0128.

EC Registered Design No. 002712232-0001.

LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime

General Information


Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Width (mm)	125
Height (mm)	45

Technical Information

Wattage	5W
Lumens Delivered	189lm
Beam Angle	120
CCT	6500K
Input	230V
Operating Temp	0°C to 45°C

Technical Data - ETIM - Emergency luminaire (EC001957)

Monitoring equipment	Automatic self test
Colour housing	White
Nominal voltage	230-230 V
Degree of protection (IP)	IP20
Protection class	I
Max. system power	5 W
Rated luminous flux acc. IEC 62722-2-1	189 lm
Colour temperature	6500-6500 K
Height/depth	45 mm
Length	125 mm

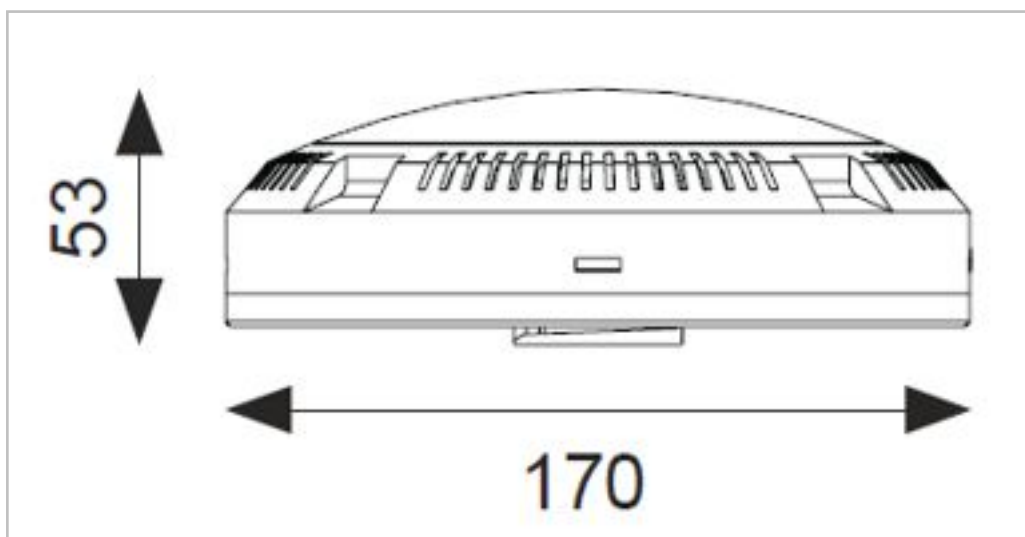

Datasheet generated from <https://onetimepim.com> last updated Monday, September 6, 2021 1:25:26 PM