



AOXLED4



Features

- Surface linear suitable for educational and commercial applications
- Modern fully enclosed surface luminaire with curved low profile appearance
- This is a widely used style of fitting within the educational sector
- Integral switches for multiple wattages and selectable CCT
- CCT selectable between 3000K and 4000K
- Steel body with polycarbonate diffuser and plastic end caps
- Dimmable options
- Powered by Philips

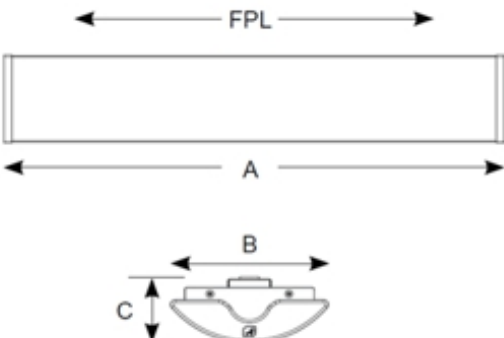
General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP40
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 54,000
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1190
Width (mm)	165
Height (mm)	70

Technical Information

Wattage	21/34W
Lumens Delivered	3200/4900lm (4000K)
Lm/W	143/144lm (4000K)
CRI	Ra 80
CCT	3000K/4000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-20°C to 50°C
SDCM	4
UGR	22

Datasheet generated from <https://onetimepim.com> last updated Tuesday, April 26, 2022 10:22:56 AM

	Code	A	B	C	FPL
	AOXLED4	1190	165	70	1084
	AOXLED5	1470	165	70	1384
	AOXLED2X4	1190	165	70	1084
	AOXLED2X5	1470	165	70	1364