

HALO




Construction

The Halo is designed to be surface mounted or suspended to a single suspension point. Available in 5 different sizes and a wide variety of RAL colours. It is the ideal option when lighting a large open space or simply wanting to create a stunning feature. The versatility of the aluminium body and LED technology used allows for inclusion of many control options including dimming, emergency options, wireless switching and scene-setting eBlue technology.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Decorative surface/suspended LED luminaire
- // European branded LED drivers
- // Up to 83 lumens per circuit watt
- // Direct/Indirect option available - 90:10 ratio
- // Extruded aluminium body available in 16 colours
- // Colour matched ceiling rose
- // 650mm, 950mm, 1250mm, 1550mm and 1950mm diameter body
- // LED 4000K, CRI>80, 50,000h life
- // Opal polycarbonate diffuser
- // Compatible with eBlue wireless switching system
- // 5 year warranty

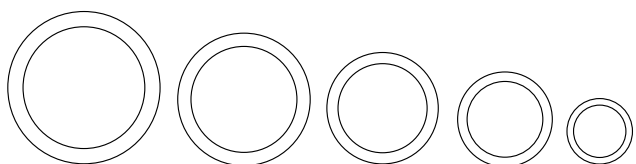

1950mm

1550mm

1250mm

950mm

650mm

SURFACE



SUSPENDED



HALO

Product Code	Description	Dimensions	Colour Temperature	Lumen Output	LED Wattage	Lumen/Watt
Halo Surface and Suspended						
HLO36	Surface/Suspended Direct Light Only	650 x 65 x 85mm	4000K	3042	39W	78
HLO54	Surface/Suspended Direct Light Only	950 x 65 x 85mm	4000K	4424	56W	79
HLO72	Surface/Suspended Direct Light Only	1250 x 65 x 85mm	4000K	5840	73W	80
HLO90	Surface/Suspended Direct Light Only	1550 x 65 x 85mm	4000K	6942	89W	78
HLO108	Surface/Suspended Direct Light Only	1950 x 65 x 85mm	4000K	8736	112W	78
Halo Suspended Direct/Indirect/90% Direct + 10% Indirect						
HLO36/DIR/IND	Suspended Direct/Indirect Light	650 x 65 x 85mm	4000K	3120	39W	80
HLO54/DIR/IND	Suspended Direct/Indirect Light	950 x 65 x 85mm	4000K	4592	56W	82
HLO72/DIR/IND	Suspended Direct/Indirect Light	1250 x 65 x 85mm	4000K	6059	73W	83
HLO90/DIR/IND	Suspended Direct/Indirect Light	1550 x 65 x 85mm	4000K	7031	89W	79
HLO108/DIR/IND	Suspended Direct/Indirect Light	1950 x 65 x 85mm	4000K	8960	112W	79

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/3K	3000K LED

Suspension Options

Option Code	Description
Ceiling Rose with Central Suspension Point (including 1.5m wires)	
CR1	Ceiling Rose Kit for 650 and 950mm versions - 3 wire
CR2	Ceiling Rose Kit for 1250mm versions - 4 wire
CR3	Ceiling Rose Kit for 1550mm versions - 5 wire
CR4	Ceiling Rose Kit for 1950mm versions - 6 wire
Colour matched Ceiling Rose supplied unless specified otherwise	
Vertical Suspension Sets (including 1.5m wires)	
SUSKIT -T1	Suspension Kit for 650 and 950mm versions - 3 wire
SUSKIT -T2	Suspension Kit for 1250mm versions - 4 wire
SUSKIT -T3	Suspension Kit for 1550mm versions - 5 wire
SUSKIT -T4	Suspension Kit for 1950mm versions - 6 wire
Ceiling Rose for Vertical Suspension (excluding wires)	
CRO	Ceiling Rose with Vertical Suspension Sets
Supply Cable	
CABTR3C	1.5m Transparent Current Cable 3 x 0.75 mm ²
CABTR5C	1.5m Transparent Current Cable 5 x 0.75 mm ²
NOTE: Alternative length suspension kits available - POA	

Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon



CR1



SUSKIT -T1



CABTR3C



CABTR5C



CRO



Direct/Indirect