


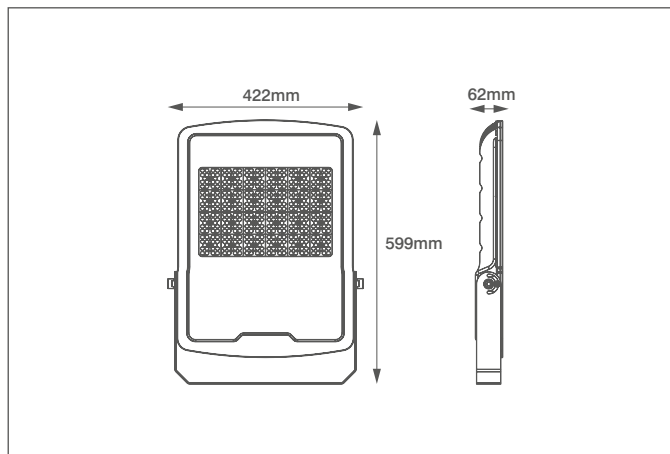


General Information

Dimensions (mm)	442 (W) x 599 (H) x 62 (D)
Materials	Body: Powdercoated Aluminium; Diffuser: Glass
Finish	Black (RAL 9004)
Product Weight (Kg)	9.05
Ingress Protection	IP65
Impact Rating (IK)	06
Warranty (Years)	5

Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50/60
Safety Class	I
Circuit Wattage (W)	300
LED Wattage (W)	300
Input Current (mA)	1670
Inrush Current/Time	100A (500µS)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +40
Critical Temperature (°C)	+50
Input Mains Cable	3 x 1mm ² H05-RNF (2 metre)

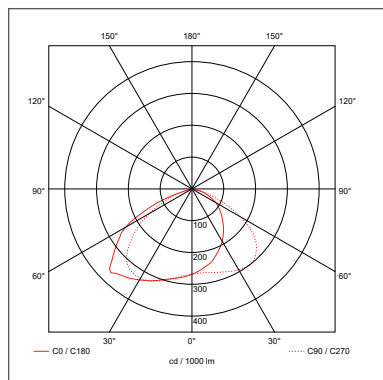

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	36000
Efficacy (lm/W)	120
Beam Angle (°)	60 x 120
Flicker Free	Yes
LED Lifetime (L70) (Hours)	50000

Dimming Information

Dimmable	No
----------	----

