


INCEPTOR® DUO

Technical Specification

Product Code: OXD556-G

Description: 50W Down & 6W Up, Suspended Linear, Dimmable & Dual CTA Switchable – Grey

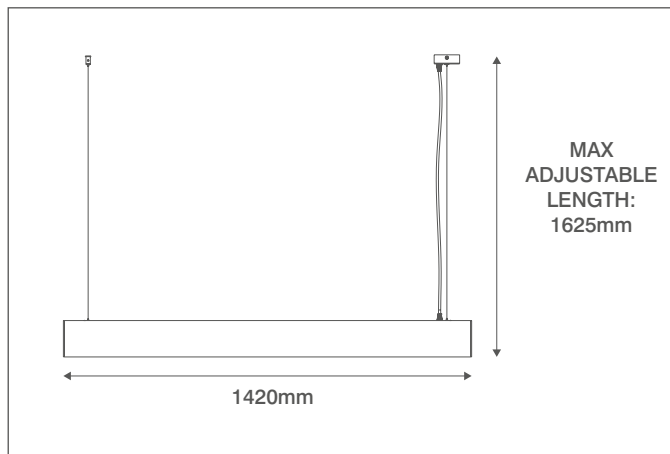

General Information

Dimensions (mm)	1420 (L) x 40 (W) x 100 (D)
Materials	Housing & Ceiling Rose: Aluminium Diffusers: Polycarbonate
Finish	Grey
Product Weight (Kg)	2.8
Ingress Protection	IP20
Mounting	Suspended
Fixing Components Supplied	Surface Brackets For Ceiling Roses
Warranty (Years)	5

Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50/60
Safety Class	I
Circuit Wattage (W)	56
LED Wattage (W)	50 (Down) & 6 (Up)
Input Current (mA)	280
Inrush Current	5A (170µs)
Power Factor	>0.9
Operating Temperature (°C)	-15 to +45
Maximum Critical Temperature (°C)	85
Input Terminations	3 Pole Push Fit Terminals

Luminaire Output


Colour Temperature (K)	3000	4000	6000
Upwards Typical Luminous Flux (lm)	300	330	300
Downwards Typical Luminous Flux (lm)	4750	5000	4750
Upwards Efficacy (lm/W)	50	55	50
Downwards Efficacy (lm/W)	95	100	95
Overall Efficacy (lm/W)	90	95	90
Beam Angle (°)	100		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
Energy Classification	E		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	Yes
Dimming Format	0(1)-10V

Additional Information

Up and Down each has CTA and switch Off option

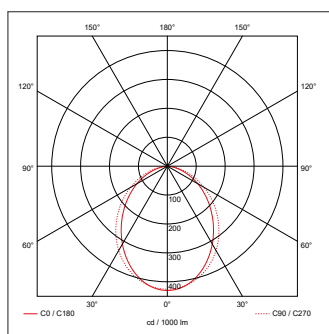

(Down)



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



DoC



Installation

