

PANEL LED

Our Panel is a back-lit LED fitting with UGR & TP(a) options. It is available in a range of outputs and optional extras.

FEATURES

- Flicker free LED panel
- Integral control options
- Integral emergency options
- Tridonic control gear
- Back-lit for efficiency
- Individual LED lenses
- UGR 19 & TP(a) option



LED

IP20

T5
EQUIVALENT


5 YEAR
WARRANTY

TECHNICAL DETAILS

Part Number	Description	Replaces	Weight (kg)	No. Per 10A	Inrush Current (A)	Circuit Watts	Board Lumens	Luminaire Lumens	LI/cW
PANEL-22-LED-4K	22W LED Panel 4000K	3 x 14W T5	1.9	24	15A 150µs	22	3212	2570	116.8
PANEL-30-LED-4K	30W LED Panel 4000K	4 X 14W T5	1.9	24	15A 150µs	30	4500	3600	120.0
PANEL-22-UGR-TPA-4K	22W UGR 19/TPa Rated 4000K	3 x 14W T5	2.0	24	15A 150µs	22	3500	2800	127.2
PANEL-30-UGR-TPA-4K	30W UGR 19/TPa Rated 4000K	4 X 14W T5	2.0	24	15A 150µs	30	4875	3900	130.0

D

KEY FEATURES

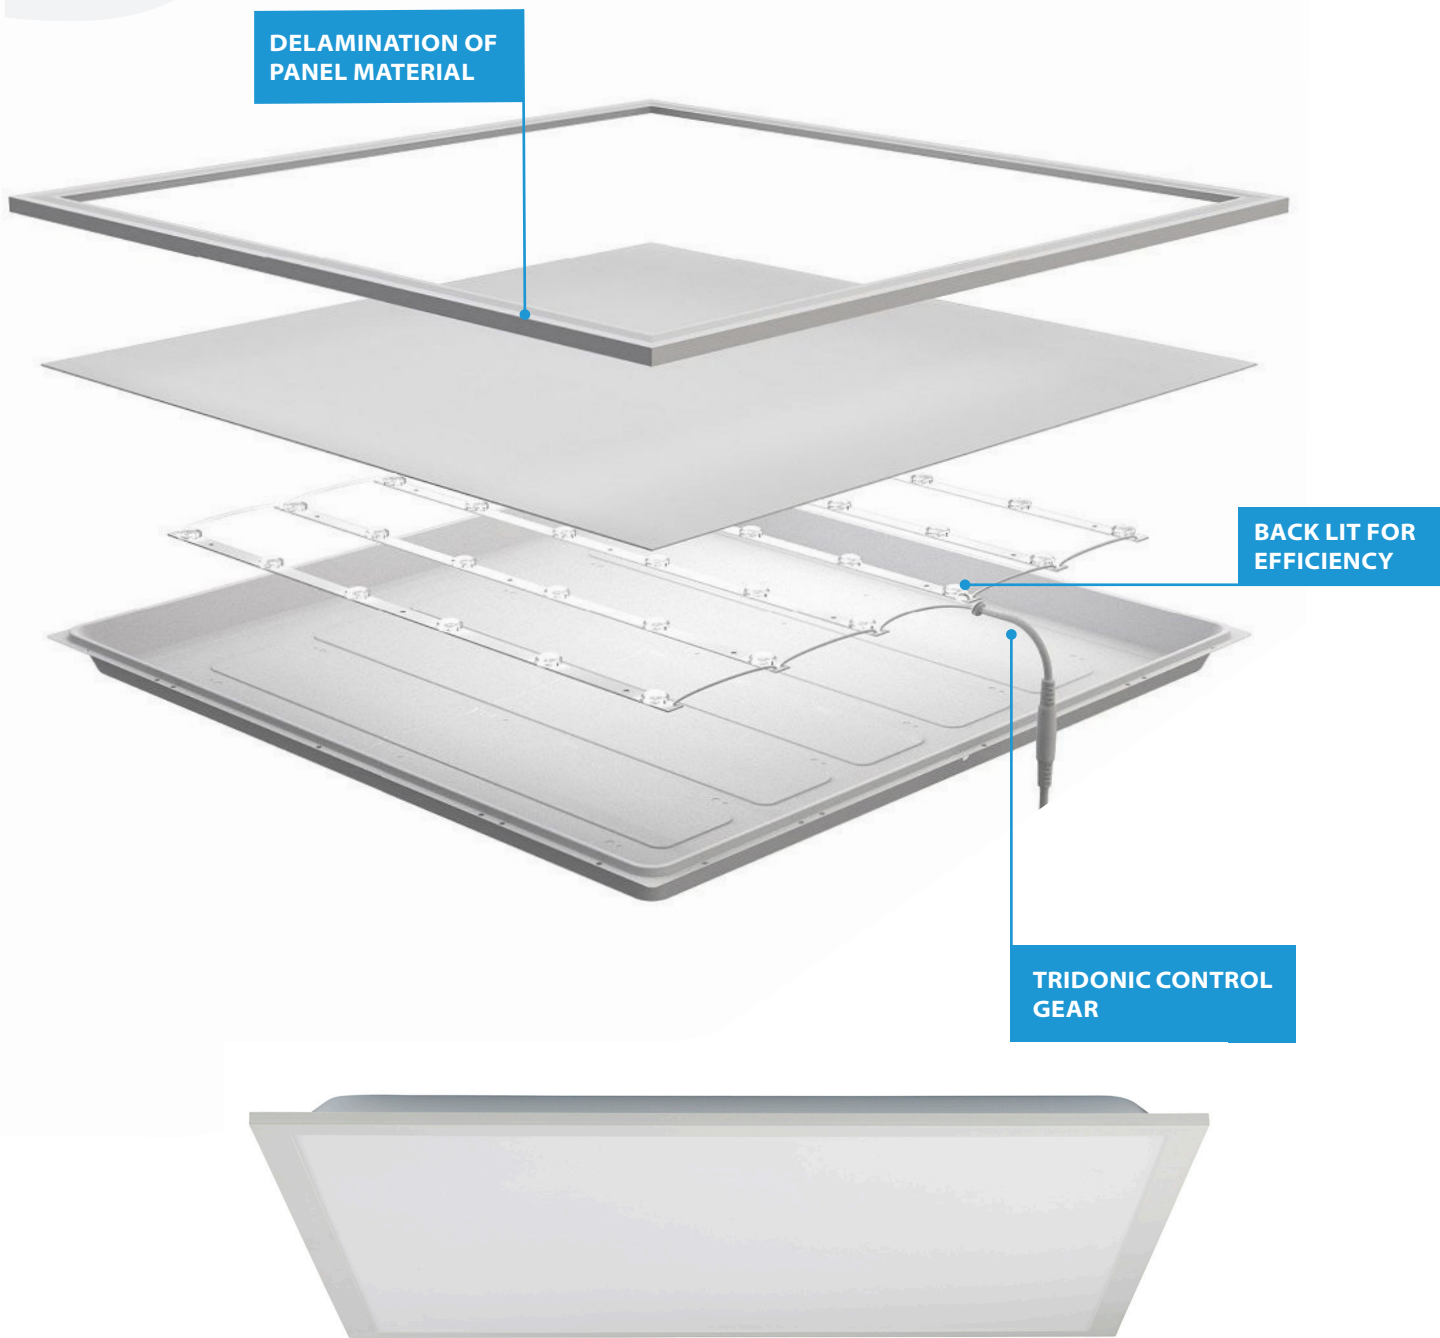

OPTIONS AND ACCESSORIES

EM	Integral Emergency (1W)
EMST	Integral Emergency Self Test (1W)
CF	Corridor Function
MWP	Remotely Programmable Microwave SwitchDIM/DALI
DD	Wireless Control System
WL	Wireless Monitored Emergency
WLEM	3000K Colour Temperature
3K	5000K Colour Temperature
5K	

PHOTOMETRIC AND DIMENSION

