

PENDANTLED



LED

IP20


CDM-T
EQUIVALENT5
YEAR
WARRANTY

Globe LED pendant fitting for atrium and marquee illumination.

FEATURES

- 400 or 450mm diameter globes available
- Integral Tridonic control gear
- 3K, 4K & 5K Ra80 colour options
- Track version available


LED CHARACTERISTICS

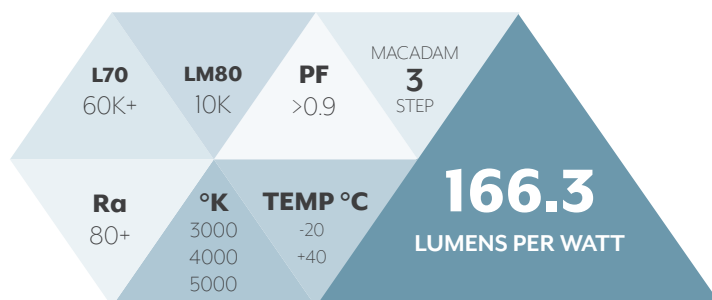

TECHNICAL DETAIL

Part Number	Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
PENDANT-440-36-4K	36W- 400mm ø Globe	70W CDM-T	2.90	35	8A 100µs	36	4657	3260	90.6
PENDANT-445-72-4K	72W- 450mm ø Globe	150W CDM-T	3.80	20	12A 50µs	72	11978	8385	116.5

DIMENSIONS



PHOTOMETRIC

