


SLICE LED

The Slice is an attractively designed up/down suspended luminaire, which comes in a range of lengths and is UGR19 compliant.

FEATURES

- Up to 6434 luminaire lumens
- Suspended or surface panel
- Uplight & downlight
- Slim design
- UGR 19 downlight element

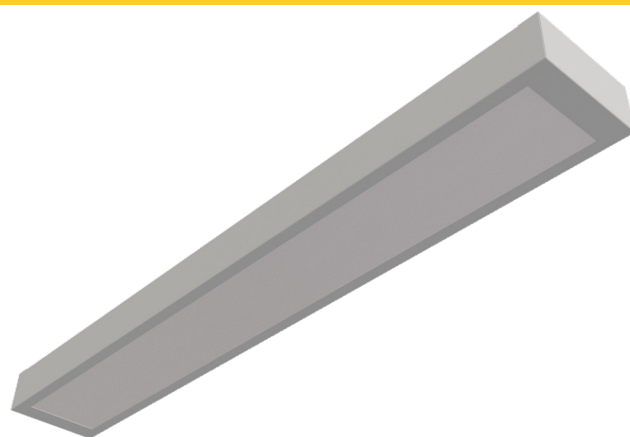

LED

IP20

T5
EQUIVALENT

5 YEAR
WARRANTY

TECHNICAL DETAILS

Part Number	Description	Replaces	Weight (kg)	No. Per 10A	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
SLC-32W-4K	1230mm 32W Luminaire	2 x 36W T8	3.9	50	5A 37μs	32	5550	3885	121.4
SLC-44W-4K	1230mm 44W Luminaire	2 x 54W T5	3.9	35	5A 37μs	44	7631	5444	123.7
SLC-38W-4K	1530mm 38W Luminaire	2 x 35W T5	5.2	35	5A 37μs	38	6590	4613	121.4
SLC-53W-4K	1530mm 53W Luminaire	2 x 58W T8	5.2	35	12A 50μs	53	9192	6434	121.4

OPTIONS AND ACCESSORIES

EM	Integral Emergency (1W)
EMST	Integral Emergency Self Test (1W)
WL	Wireless Control System
WLEM	Wireless Emergency Monitoring
DD	SwitchDIM/DALI
MWP	Remote Programmable Microwave
3K	3000K Colour Temperature
5K	5000K Colour Temperature

PHOTOMETRIC AND

