

# SPECTRUM LED

The Spectrum offers an attractive range of surface LED luminaires with a multitude of applications.

## FEATURES

- Fitted with a reeded acrylic wrap around frosted prismatic diffuser for an even light distribution
- Diffuser held captive within the polycarbonate injection moulded end cap for a positive fixing
- Slim profile
- Manufactured from mild steel



LED

IP44



T5  
EQUIVALENT

5 YEAR  
WARRANTY

## TECHNICAL DETAILS

| Part Number      | Description              | Replaces    | Weight (kg) | No. Per 10A Breaker | Inrush Current (A) | Circuit Watts | Board Lumens | Luminaire Lumens | LI/cw |
|------------------|--------------------------|-------------|-------------|---------------------|--------------------|---------------|--------------|------------------|-------|
| SPE-22-LED-4K-HE | 695mm 22W 2ft Luminaire  | 2 x 18 W T8 | 2.1         | 50                  | 5A 37µs            | 22            | 3815         | 2671             | 121.4 |
| SPE-32-LED-4K-HE | 1295mm 32W 4ft Luminaire | 2 x 36W T8  | 3.8         | 50                  | 5A 37µs            | 32            | 5550         | 3885             | 121.4 |
| SPE-44-LED-4K-HE | 1295mm 44W 4ft Luminaire | 2 x 54W T5  | 3.8         | 35                  | 5A 37µs            | 44            | 7631         | 5444             | 121.4 |
| SPE-38-LED-4K-HE | 1595mm 38W 5ft Luminaire | 2 x 35W T5  | 5           | 35                  | 5A 37µs            | 38            | 6590         | 4613             | 121.4 |
| SPE-53-LED-4K-HE | 1595mm 53W 5ft Luminaire | 2 x 58W T8  | 5           | 35                  | 12A 50µs           | 53            | 9192         | 6434             | 121.4 |
| SPE-48-LED-4K-HE | 1895mm 48W 6ft Luminaire | 1 x 70W T8  | 6           | 35                  | 12A 50µs           | 48            | 8325         | 5827             | 121.4 |
| SPE-68-LED-4K-HE | 1895mm 68W 6ft Luminaire | 2 x 70W T8  | 6           | 25                  | 15A 50µs           | 68            | 11793        | 8255             | 121.4 |

# KEY FEATURES

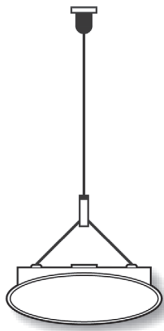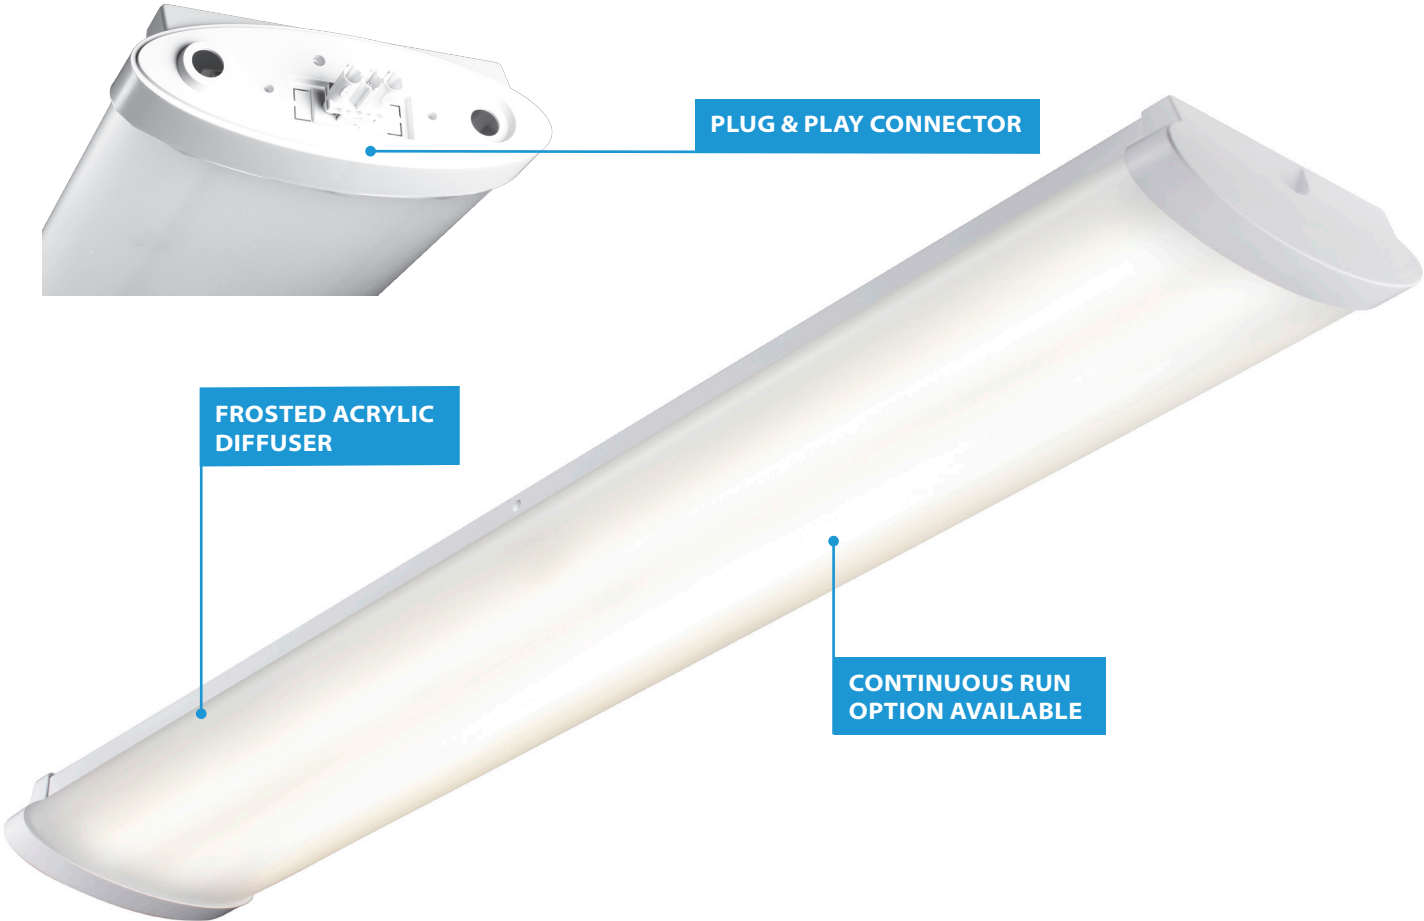

Pendant Suspension Kit

| Part Number      | Length | Width |
|------------------|--------|-------|
| SPE-22-LED-4K-HE | 695    | 208   |
| SPE-32-LED-4K-HE | 1295   | 208   |
| SPE-44-LED-4K-HE | 1295   | 208   |
| SPE-38-LED-4K-HE | 1595   | 208   |
| SPE-53-LED-4K-HE | 1595   | 208   |
| SPE-48-LED-4K-HE | 1895   | 208   |
| SPE-68-LED-4K-HE | 1895   | 208   |

## OPTIONS AND ACCESSORIES

- EM** Integral Emergency (1W)
- EMST** Integral Emergency Self Test (1W)
- DD** SwitchDIM/DALI
- WL** Wireless Control System
- WLEM** Wireless Emergency Monitoring
- MWP** Remote Programmable Microwave
- NL** Integral 3W Night Light
- 1.5SK** 1500mm Pendant Suspension Kit
- 3SK** 3000mm Pendant Suspension Kit
- 3K** 3000K Colour Temperature
- 5K** 5000K Colour Temperature

## PHOTOMETRIC AND DIMENSION

