


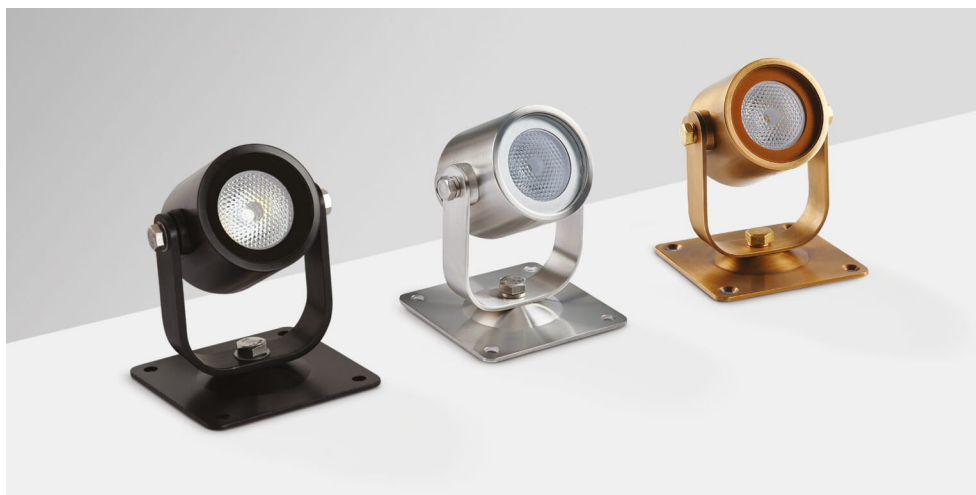

# UL010

Universal LED light

## Features

|                 |                          |
|-----------------|--------------------------|
| IP rating       | IP68                     |
| Tilttable       | 360°                     |
| Rotation Angle  | 360°                     |
| Dimmable Option | Yes with suitable driver |
| LED Lifetime    | 70,000h L70              |
| CRI             | 80 Ra                    |
| SDCM            | 3 SDCM                   |

## Installation information

|                             |                       |
|-----------------------------|-----------------------|
| Construction Material       | Stainless steel (316) |
| Maximum Ambient Temperature | 35°C                  |
| Electric Class (1, 2, 3)    | 3                     |

## Photometrics @ 25°C

| Product code | Finish                   | W  | Colour | Beam | lm  | lm/W | lx @ 1m |
|--------------|--------------------------|----|--------|------|-----|------|---------|
| UL010 NW     | Stainless steel 316      | 3W | 4000K  | 26°  | 119 | 40   | 648     |
| UL010 WW     | Stainless steel 316      | 3W | 3000K  | 26°  | 95  | 32   | 411     |
| UL010 27     | Stainless steel 316      | 3W | 2700K  | 26°  | 92  | 31   | 399     |
| UL010 A WW   | Brass                    | 3W | 3000K  | 26°  | 95  | 32   | 411     |
| UL010 A 27   | Brass                    | 3W | 2700K  | 26°  | 92  | 31   | 399     |
| UL010 B 30   | Black anodised aluminium | 3W | 3000K  | 26°  | 95  | 32   | 411     |
| UL010 B 27   | Black anodised aluminium | 3W | 2700K  | 26°  | 92  | 31   | 399     |

## Wiring information

|                         |                                                       |
|-------------------------|-------------------------------------------------------|
| Cable / Flying Lead     | 3m (H05RN-F) rubberised cable (outside diameter: 6mm) |
| Type of Wiring Required | Series                                                |

## Accessories

|                 |                                                           |                 |
|-----------------|-----------------------------------------------------------|-----------------|
| JB2 / JB4       | Waterproof junction box / Gel filled waterproof connector | Sold Separately |
| PDC/GRID DIMMER | Grid dimmer kit for multiple fitting types                | Sold Separately |
| WCR 275 BLACK   | 2-core rubber cable                                       | Sold Separately |



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

7 year extended warranty

## Features & benefits

3W at 700mA

Coastal protected

IP68 ideal for outdoor areas and under water lighting

Complete with wall fixings

Robust cable for use outdoors

Tilt & rotate for adjusting light

Long lifetime of 70,000hrs

Beam angle: 26°

